

STRONG JOINTS .
BEAUTIFUL FINISH.



EPOXY GROUT

adigres 

AVAILABLE IN

21

COLORS

WHITE

IVORY

TRANSPARENT

LIGHT GREY

DARK GREY

BLACK

DARK BROWN

CAMEL

JAISALMER

SILVER

GOLDEN

SKY BLUE

TURQUOISE

GREEN

PEACH

PINK

TERRACOTTA

RED

CYAN

BLUE

NIGHT GLOW

[GLOWS IN DARK]

EPOXY GROUT

A two-part system, comprising of PART A & PART B. For ease of application and the ability to fill tile / stone joints the grout is best mixed to a smooth, creamy consistency.

FEATURES

STERILE DURABLE JOINTS
HYGIENIC
CHEMICAL RESISTANT
DUST PROOF
HIGH STRENGTH BACTERIAL
RESISTANT HIGH ABRASION
RESISTANT

MIXING

Before use of Epoxy Grout shake of PART A and PART B. Add PART B to PART A in 6:4 ratio in a suitable clean container and thoroughly mix together. Immediately pour the mixed grout onto the working area. The mixed Epoxy Grout is usable for up to 35 minutes at 27 ± 1 C. Grouting at certain points stiffer consistency required to 'stop' open-ended joints or grout skirting tiles.

SIZES AVAILABLE

5 KG

10 KG

20 KG

NOTE :

Care should be taken to avoid staining tiles when grouting. This is especially applicable when grouting unglazed floor tiles, quarry tiles, and tiles with a matt glaze or textured surface.

Check the potential risk of staining by applying the grout to a few tiles in a small trial area.

Do Not bring floor into service until Epoxy Grout is hard / cured.

Avoid contact between food and tiling for at least 7 days after grouting.

Epoxy Grout has a shelf life of 12 months when stored in normal dry conditions.

TECHNICAL SPECIFICATION

PROPERTIES

RESULTS

Epoxy Grout

@ 27 ± 1 C

Joint Width

2 - 20 mm

Pot Life

45 minutes

Setting Time

48 hours

Temperature Resistance

-30 C to 50 C 0
Intermittent up to 70 C

Water Absorption

Nil

Specific Gravity

1.75

Shore D Hardness

> 70


Tensile Adhesion (14 day air)

Epoxy Grout

>4.5 (Dry Condition (kN))

Epoxy Grout

>3.6 (Wet Condition (kN))

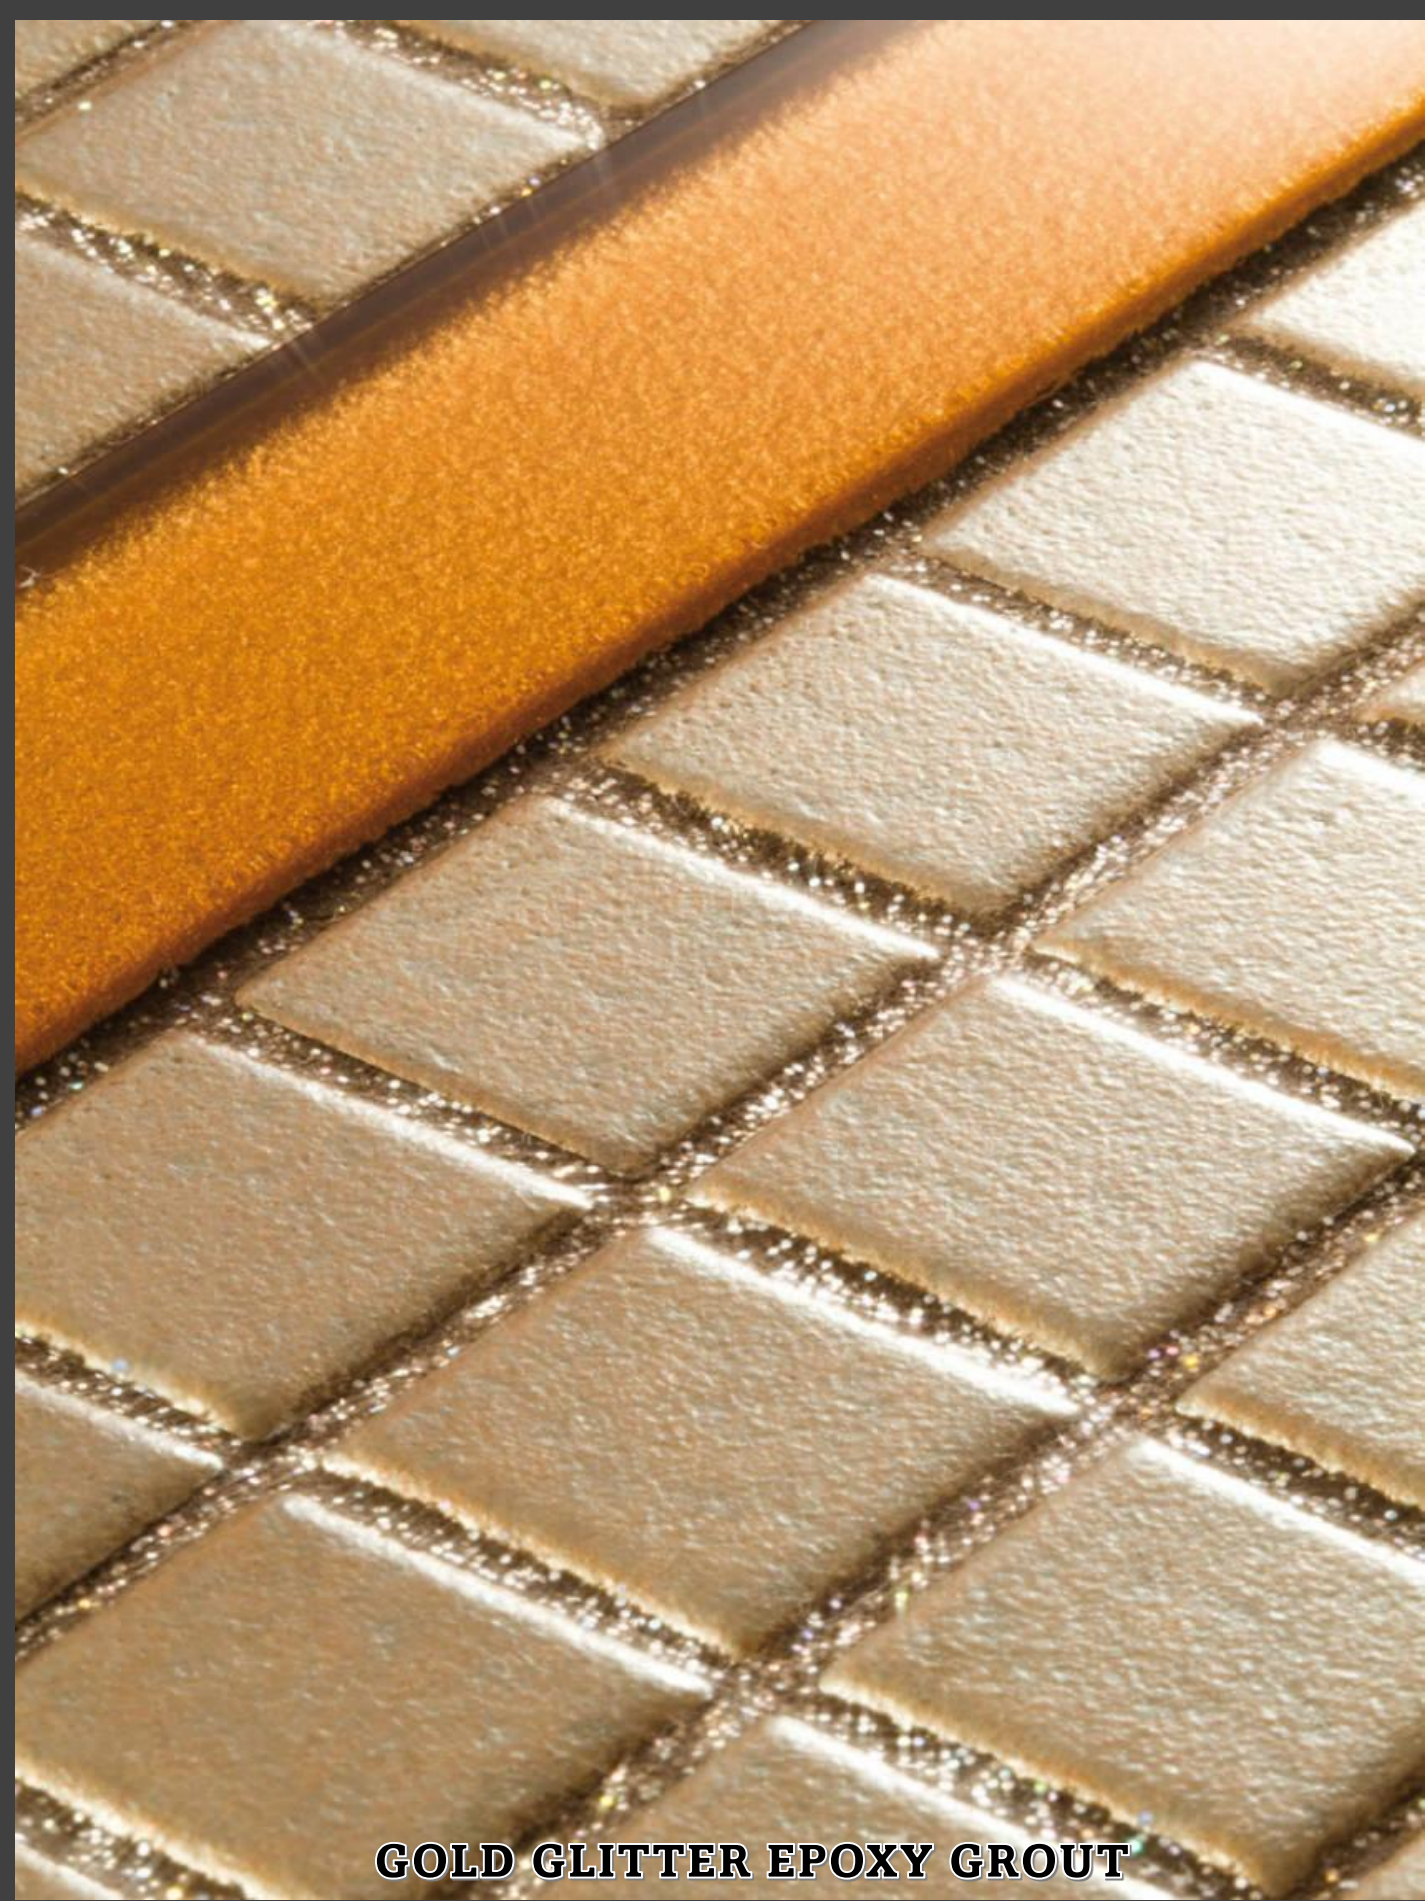

GOLD GLITTER EPOXY GROUT



SILVER GLITTER EPOXY GROUT